




**PRESENT WITH
REALISTIC IMAGERY
AND VIVID AUDIO**

AVer **VC520 Pro3**

Professional camera and speakerphone
for mid-to-large room meeting



The VC520 Pro3 stands out as an advanced conferencing system. It boasts a 36X total zoom PTZ camera, enhanced AVer SmartFrame, Preset Framing, and a Sony WDR sensor. Additionally, the VC520 Pro3 offers 3-way outputs, including HDMI® connectivity, for a wider range of streaming options and a superior video and audio experience. But what truly sets the VC520 Pro3 apart is its Smart Composition feature, an embedded AI function designed to swiftly capture high-quality closeup images of meeting participants. And with an extended speakerphone solution, the VC520 Pro3 delivers an exceptional video conferencing experience.

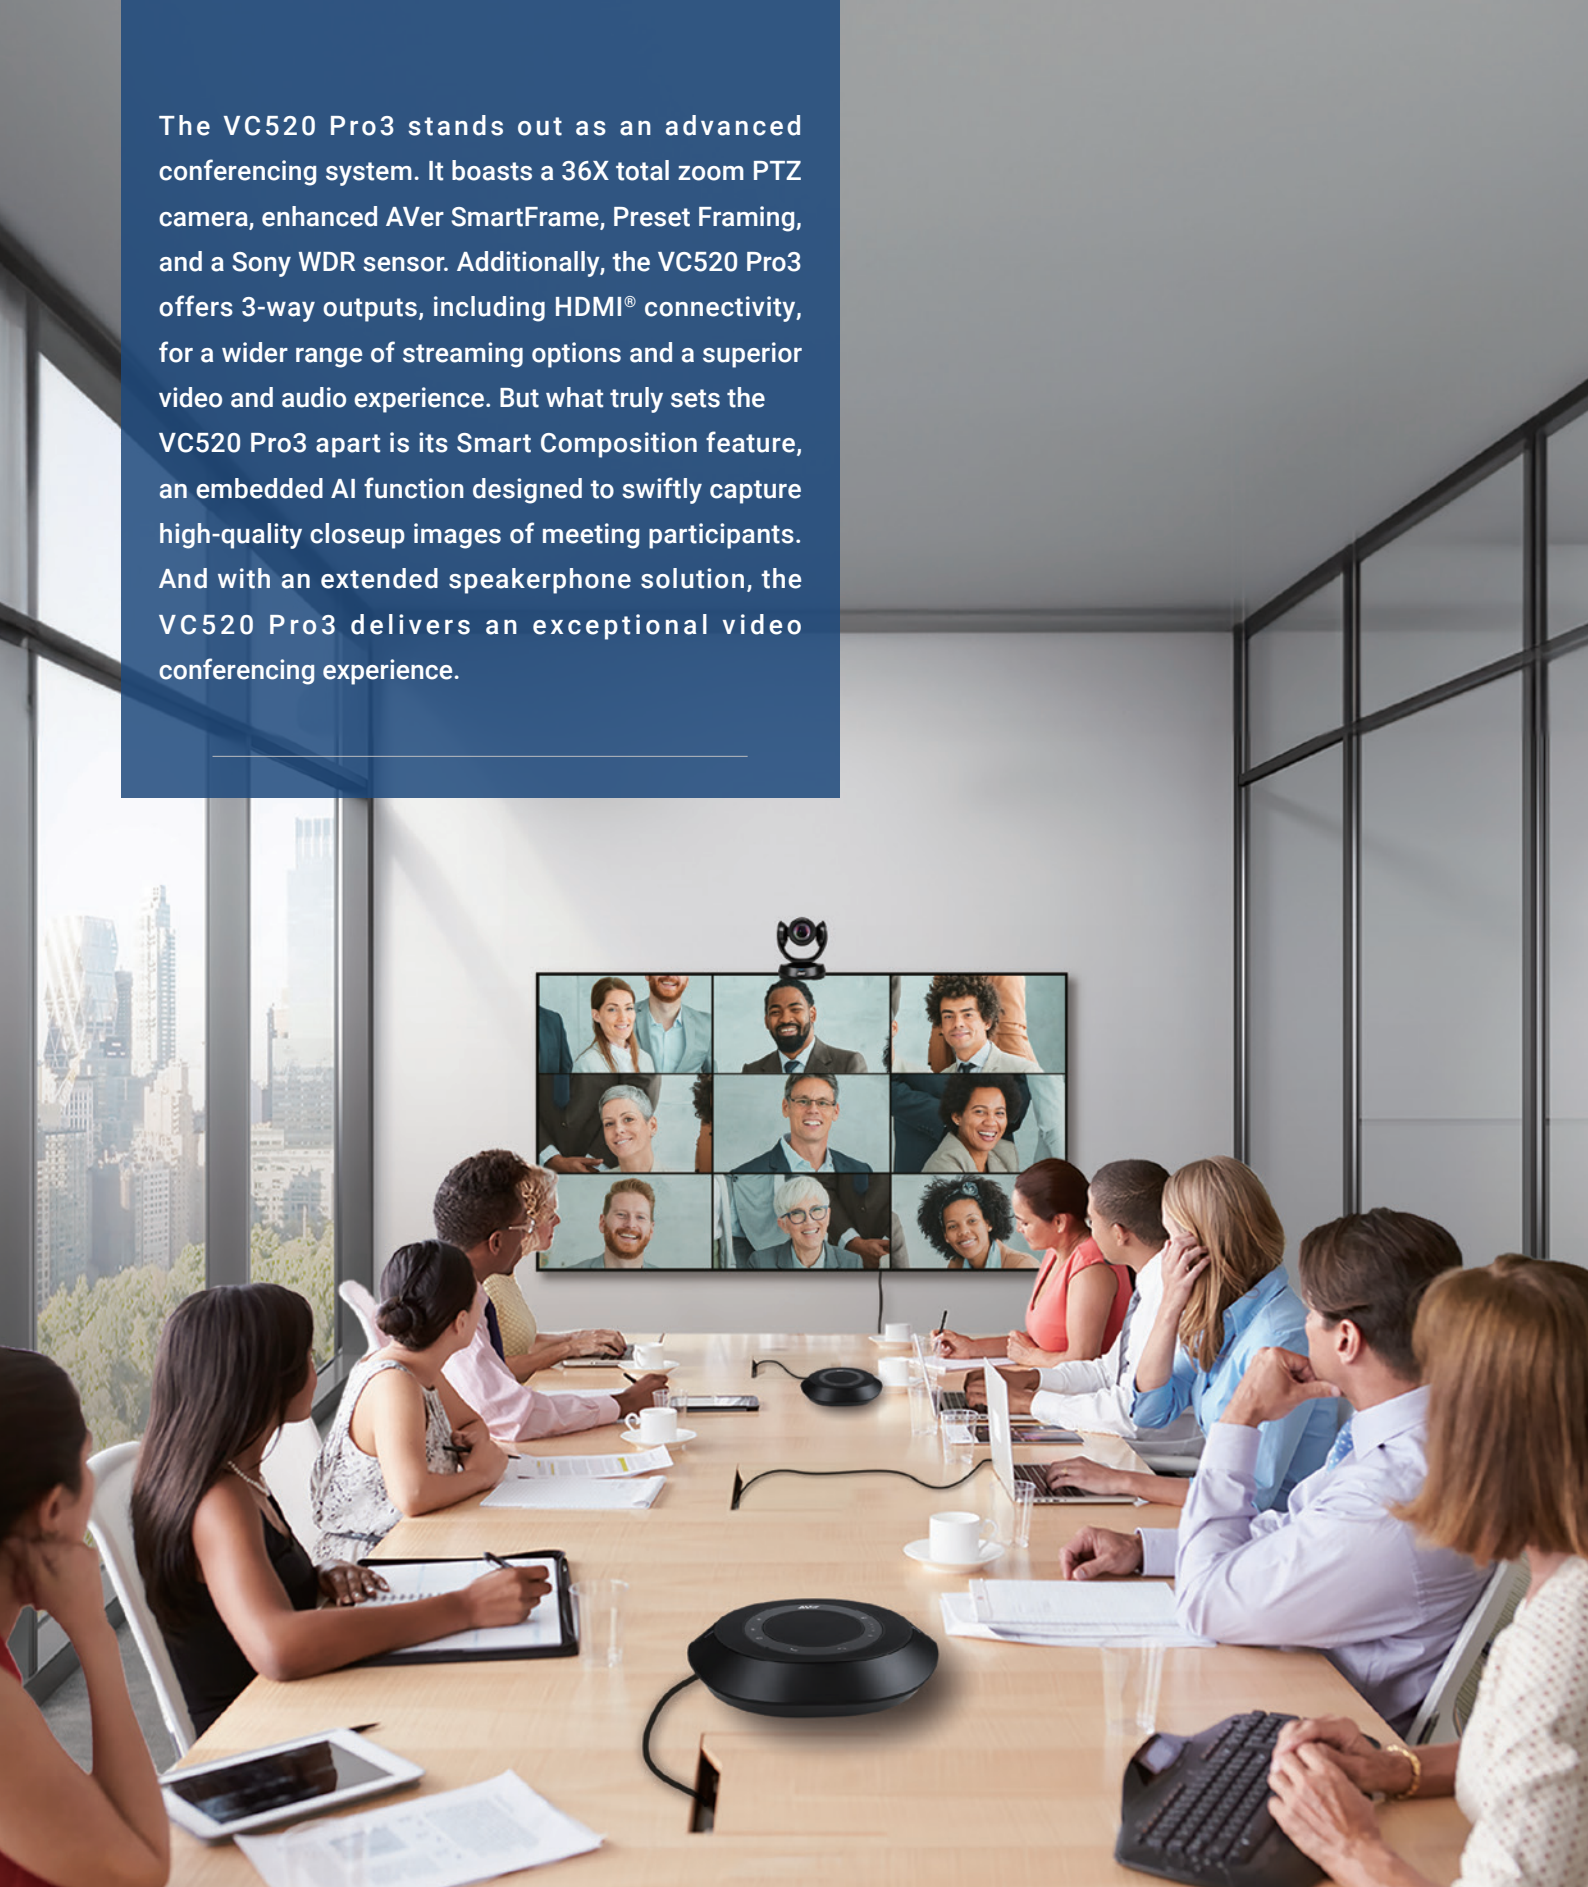

Full HD 1080p



One USB Cable



Smart Composition



Present Every Detail



Offer Multiple
Audiovisual Options



Speakerphone
Extension Solutions

Dominate the Details with 36X* Total Zoom Lens and WDR Sensor

Host flawless meetings with the VC520 Pro3's PTZ lens that offers, boasting an expansive 80.5° diagonal field of view for capturing wide shots and offering versatile pan and tilt controls for focusing on presenters, attendees, whiteboard content, or physical objects. Harness precision with a 12X optical lens and a remarkable 36X* total zoom, including a 24X lossless zoom for exceptional clarity in remote communication. Plus, the Sony WDR sensor ensures adapt to diverse lighting conditions, making the VC520 Pro3 the perfect conferencing camera for mid-to-large rooms.

*Use Room Management (PTZApp 2) to set up 36X zoom



Accurate Attendee Capture with AVer Smart Composition – No Installation Required

The VC520 Pro3 is one of the first PTZ camera and audio systems on the market to offer a Smart Composition feature – technology usually only found in enterprise-grade devices. Smart Composition uses AI algorithms to automatically frame each participant's face or body perfectly. It's a click-to-play feature with no software setup needed. Seamlessly transition between headshots and half-body views, effortlessly switching from individual to group images. With the VC520 Pro3, you'll enjoy high-definition views of participants and easy meeting setups for optimal productivity.



Flexible Video Outputs for Multi-Purpose Applications

The VC520 Pro3 enables simultaneous connection and output through HDMI®, USB, and IP ports, delivering three concurrent high-quality 1080p 60fps video streams, making it incredibly adaptable for a wide range of applications. Whether you're hosting virtual meetings, giving presentations, or live streaming via RTSP/RTMP, the VC520 Pro3 handles it all with ease.

* All HDMI trademarks and trade dress are registered trademarks or trademarks of HDMI Licensing Administrator, Inc.



Support Video and Audio with One USB Cable Solution

Setting up the VC520 Pro3 is simple. Plugging a single USB cable into your computer is all it takes to get ready for a call, which saves time and helps you maintain an uncluttered meeting space. Simplify your setup and reduce installation costs with the VC520 Pro3.



Exceptional Audio Quality with an Extended Speakerphone

The VC520 Pro3 delivers a consistent and well-balanced audio performance. Also, it accommodates either two expansion speakerphones or a full-duplex microphone set. This innovative speakerphone feature makes the VC520 Pro3 the ideal choice for mid-to-large conference rooms.



*Note: Expansion speakerphones and microphones cannot be added together.
*Note: The standard speakerphone cannot be applied as an expansion speakerphone.

Product Specifications

Camera

- Image Sensor: 1/2.8" 4K Sony Exmor CMOS
- Resolution: (16:9) 1920 x 1080, 1280 x 720 at 60, 30, 15fps; 1600 x 900, 960 x 540, 848 x 480, 800 x 448, 640 x 360, 424 x 240, 320 x 180 at 30, 15fps; (4:3) 1280 x 960, 800 x 600, 640 x 480, 480 x 360, 320 x 240 at 30, 15fps
- SmartFrame for automatic FOV adjustment to fit all participants.
- Smart Composition function offers great visibility for the individual participant in the meeting room.
- Innovative Preset Framing: Follow the presenter based on preset areas.
- WDR: Superb backlight compensation technology for optimizing light balance in high-contrast conditions.
- Zoom: 36X* Total Zoom (12X Optical Zoom)
- Viewing Angles: DFOV: 80.5°, HFOV: 72.8°, VFOV: 44.1°
- Lens focal length: 3.9 mm (wide) ~ 46.8 mm (tele)
- Lens F#: 1.6 (wide) ~ 2.8 (tele)
- Mirror, flip, white balance: Auto/manual override via Room Management (PTZApp 2)
- Minimum focus distance: 1m
- Standard tripod screw holes and Kensington slot.
- People-counting API: Enterprises and third-party software providers can obtain people-counting data for a better understanding of meeting space usage.

*Please use Room Management (PTZApp 2) to set up 36X zoom.

Speakerphone

- Acoustic Echo Cancellation (AEC): Yes
- Noise Suppression: Yes
- Dual-omnidirectional Microphone
- 3.5 mm Phone-in Jack
- 3.5 mm Line Out
- Speaker: 6W, Adjustable to 90dB SPL at 0.5 m
- Touch Controls for volume down/up, mute, phone input, call, hang-up
- Bridge phone-in and USB into one call
- Security: Kensington Slot

Control

- IR Remote Control
- VISCA/Pelco-P/Pelco-D via RS-232 (128 preset points via VISCA command)
- Remote Side: VISCA over IP, IP (RJ-45)
- UVC/UAC Plug-and-Play
- WebUI: Browser IP access via Chrome browser
- Room Management (PTZApp 2)

Video Format

- YUV, YUY2, MJPEG
- Network Video Compression format: H.264, H.265
- Network Protocol: RTSP, RTMP

Motorized Pan & Tilt Movement

- Pan: ±170°
- Tilt: +90° (up) -30° (down)
- 10 Camera Presets (via remote control)

Connectivity

- 12V/5A Power Adaptor
- Mini DIN9 for RS-232 In & Out Connection (VISCA control panel and camera daisy-chain)
- USB 3.1 Type-B Connector
- IP (RJ-45)
- HDMI® Out

USB

- Connector: USB 3.1
- USB Video Class (UVC): UVC 1.1
- USB Audio Class (UAC): UVC 1.0

Mount

- Camera Wall-Mount Bracket
- Foldable TV mount (Optional)
- Ceiling Mount (Optional)

System Requirements

- Windows® 7/10/11
- macOS® 10.4 or later
- Google Chromebook™ (Chrome OS 94.0.4606.114 or later)

PC Hardware Requirement

- 3.2 GHz Intel® Core™ i5-4460 Processor
- 4 GB RAM or more
- USB 3.1 Port (Backward compatible with USB 2.0 port)

Environmental Data

- Operation temperature: 0°C ~ 40°C
- Operation humidity: 20% ~ 80%
- Storage temperature: -20°C ~ 60°C
- Storage humidity: 20% ~ 80%

Dimensions

- Package dimensions: 259 x 259 x 349 mm
- Package weight: 5.805 kg
- Camera: 182 x 142.7 x 153 mm/1.47 kg
- Speakerphone: 220 x 181.5 x 49.5 mm/0.85 kg
- Remote control: 200 x 50 x 21 mm/0.09 kg

Optional Accessories

- Mini DIN8 to D-SUB9 RS232 adapter
- Expansion Speakerphone
- Expansion Microphone
- Foldable TV mount
- USB3.1 fiber extender 10m
- USB3.1 type-B to type-A cable 3m
- Ceiling mount

Webpage Browser Requirements

- Chrome: Version 76.x or above
- Firefox: Version 69 or above
- Internet Explorer: Not support

Power Supply

- AC 100V ~ 240V, 50/60 Hz
- Consumption: 12V, 5A

Software Tools

Room Management (PTZApp 2)

- Supports Windows® 7 or later, macOS® 11.6 or later

Enterprise Management

- Supports Windows® 10 or later

Cloud Management

- Supports Chrome™ & Microsoft Edge browsers

EZManager 2

- Supports Windows® 7 or later

EZLive

- Supports Windows® 7 or later

Package Contents

- VC520 Pro3 Camera
- VC520 Pro3 Speakerphone
- Remote Control
- Power Adaptor
- Power Cord
- USB 2.0 Type-B to Type-A Cable
- Camera to Speakerphone Cable
- 3.5 mm aux Cable
- Wall-Mount Bracket
- Tripod Screw
- QR Code Card

Warranty

- Camera / Speakerphone: 3 years*
- Accessories: 1 year

*We offer an optional 2-year extended warranty in Europe. Please contact your local supplier for details.

Compatible Applications

Zoom, Microsoft® Teams, Google Meet™, Intel® Unite™, RingCentral, BlueJeans, V-Cube, LiveOn, CyberLink U Meeting®, TrueConf, Adobe® Connect, Cisco Webex®, Fuze, GoToMeeting™, VidyoConnect™, vMix, WebRTC, Wirecast, XSplit

Audio Format

- AAC-LC
- Network Protocol: RTSP, RTMP

* Specifications may vary depending on location and are subject to change without notice.

Hardware Specifications

CAMERA BACK PANEL



- | | |
|---------------------------------------|----------------------------------|
| 1 LAN for IP streaming /remote access | 4 USB 3.1 Type-B Port |
| 2 HDMI® Output Port (to TV) | 5 Speakerphone Port (Blue cable) |
| 3 RS-232 In/Out Port | 6 DC 12V Power Jack |

SPEAKERPHONE BACK PANEL



- | | |
|--|----------------------------|
| 1 Speakerphone Port (Red Cable, for extended speakerphone and microphone connection) | 3 Line Out Port |
| 2 Phone In Port | 4 Camera Port (Blue Cable) |
| | 5 Kensington Lock |

SPEAKERPHONE



- | | |
|--------------------|------------------------|
| 1 Mute/Unmute | 5 LED status indicator |
| 2 Phone input | 6 Volume down |
| 3 Make/Answer call | 7 Hang up call |
| 4 Volume up | |



©2026 Aver Information Inc. All rights reserved.
All brand names and logos are trademarks of their respective companies.